




---

# The nature of cyber incidents

Based on cyberattack investigations  
conducted by Kaspersky Global Emergency  
Response Team

## How attackers first gained access

2019 2020 2021

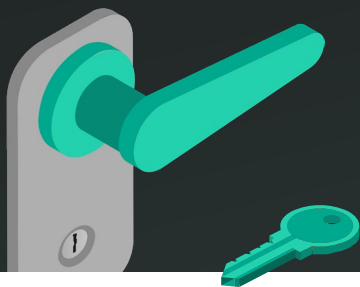

### Vulnerability exploitation

37.0% 31.5% 53.6%

### Compromised accounts

13.0% 31.6% 17.9%


### Malicious email

30.0% 23.7% 14.3%

## Attackers' tools of choice


The trend of using LOLBins - Living Off The Land Binaries - persists. PowerShell remains one of the most popular tools among attackers at the Lateral Movement stage.

PsExec, Mimikatz and Cobalt Strike retain the title of the most popular attacking tools in recent years. In 2021, these tools were involved in 10.8%, 9.7% and 9.7% of all attacks respectively.

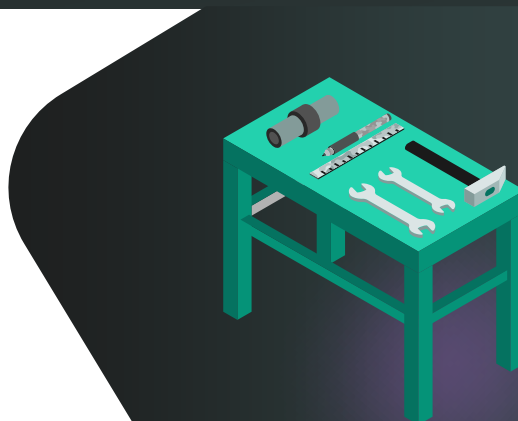

## Attack impact

For 3 years in a row, file encryption has been the #1 problem facing our customers - companies. The number of companies who encountered cryptors in their network increased from 34% in 2019 to 51.9% in 2021.

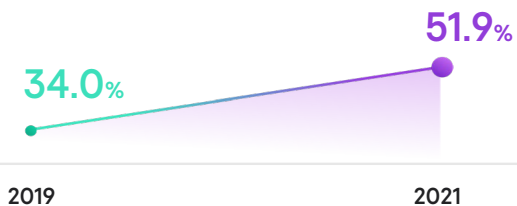


## Top targeted industries

Industrial, Government and Financial remain the top 3 targeted industries.

- Industrial
- Government
- Financial

In 2021 we noticed a significant growth in incident response requests from Industrial and IT companies.

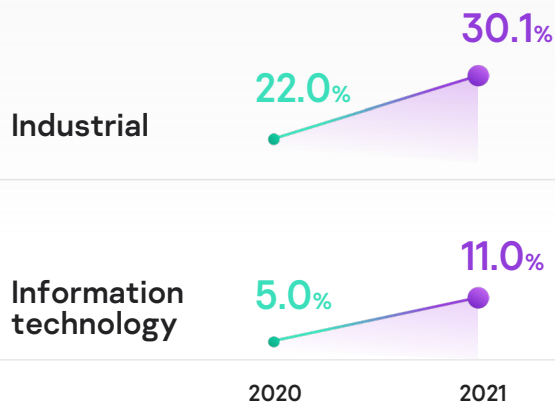

## Top 3 attacked regions

Companies requesting Kaspersky Incident Response services were mostly from 3 regions.





- Europe** Came out on top in 2021 with 30.1%
- CIS** First place in 2020
- Middle East** The #1 region in 2019

# Trends in 2021

## Ransomware cases



Distribution of attacks by duration depending on the initial vector

Initial attack vector	Hours	Weeks	Months	Grand Total
 Exploitation of public-facing applications	12.5%	0.0%	25.0%	37.5%
 Malicious email	0.0%	0.0%	25.0%	25.0%
 Compromised accounts	12.5%	12.5%	12.5%	37.5%
 Grand Total	25.0%	12.5%	62.5%	100%

According to the research data during attacks associated with ransomware, the same basic methods that are inherent in other types of attacks were used as the initial attack vector. Exploiting vulnerabilities and previously compromised user accounts were used in **37.5%** of cases, while malicious mail was used in every fourth case with cryptors.

However, in a number of attacks, the adversary's goal was not extortion or data encryption, but company data, personal data, intellectual property, and other sensitive information. Managing the damage from these kinds of attacks is almost impossible. It leads to reputational loss as well as potential penalties from regulators and lawsuits. All this is used as an additional incentive for blackmail.

We observed data leakage in 10% of cases with cryptors. In addition, the purpose of using cryptors is sometimes to hide the initial traces of an attack and complicate incident investigations.

Analyzing the duration of attacks with cryptors, it can be concluded that a significant period of time passes between the initial compromise of the network and the final stage of the attack. In **62.5%** of attacks, attackers spend more than a month inside the network before encrypting data. A properly organized process of attack detection and response reduces the time it takes to detect attackers in the network and prevent final damage.

After the initial penetration, attackers use PowerShell to collect data, Mimikatz to escalate privileges, PsExec to execute commands remotely or frameworks like Cobalt Strike for all stages of attack.

## Vulnerability Exploitation

In all cases when exploiting vulnerabilities was used as the initial vector, the main damage is data encryption.

The most prevalent vulnerability in our data set is the CVE-2021-26855 Microsoft Exchange SSRF vulnerability in Microsoft Exchange Server which allows attackers to send arbitrary HTTP requests and authenticate as the Exchange server (used by Hafnium group). It was exploited in 22.7% of cases when vulnerabilities were used.

Despite the fact that the protection measures against this attack vector are straightforward – security update, 1-day vulnerabilities are far ahead of other methods of initial penetration.



# 2021 Incident Response Overview

## And Experts' Recommendations

### Threat intelligence view

Response statistics are based on IR retainer and emergency cases from 2021

#### Initial attack vector

- 1 Implement a robust password policy and multifactor authentication **53.6%** Exploitation of public-facing applications
- 2 Remove management ports from public access
- 3 Set zero-tolerance policy to patch management or compensation measures for public-facing applications **14.3%** Malicious email
- 4 Ensure employees maintain a high level of security awareness **17.9%** Compromised accounts

- 5 Implement rules for detection of pervasive tools used by adversaries
- 6 Employ a security toolstack with EDR-like telemetry
- 7 Constantly test reaction times of security operations with offensive exercises
- 8 Ensure employees maintain a high level of security awareness



#### Move around and get things done


In 39.7% of all cases, legitimate tools were used

- 9.7%** Cobalt Strike
- 9.7%** Mimikatz
- 8.6%** PowerShell
- 10.8%** PsExec

#### Impact

- 9 Back up your data **16.0%** Data leakage
- 10 Work with an Incident Response Retainer partner to address incidents with fast SLAs
- 11 Continuously train your incident response team to maintain their expertise and stay up to speed with the changing threat landscape **51.9%** Files encrypted
- 12 Implement strict security programs for applications with Personally Identifiable Information **11.1%** Active Directory compromised

#### Industries and regions, %

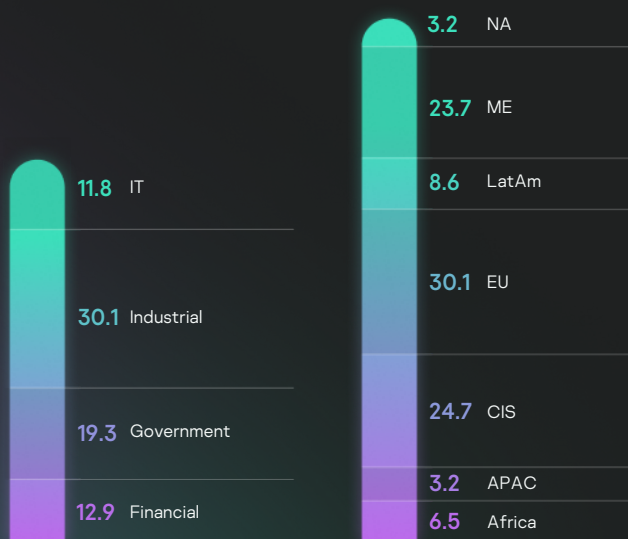

#### Security operations metrics view, %



Understand the adversary profiles targeting your industry and region to prioritize security operations development


# Introduction

The Incident Response Analyst Report provides insights into incident investigation services conducted by Kaspersky in 2021. We deliver a range of services to help organizations when they are in need: incident response, digital forensics and malware analysis. Data in the report comes from our daily practices with organizations seeking assistance with full-blown incident response or complimentary expert activities for their internal incident response teams.<sup>1</sup>


In 2021, although the main threat trends remained, our service approach moved to near-complete - 98% of all cases - remote delivery. Kaspersky Digital Forensics and Incident Response operations are handled by our Global Emergency Response Team (GERT)<sup>2</sup> with experts in Europe, Asia, South and North America, the Middle East and Africa.




In 2020, the COVID-19 pandemic forced companies to restructure their information security practices to accommodate remote working.

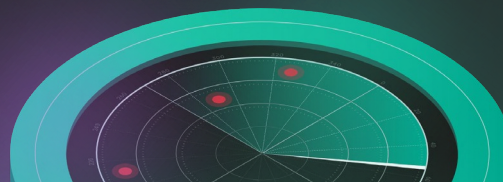

## Geography of incident responses

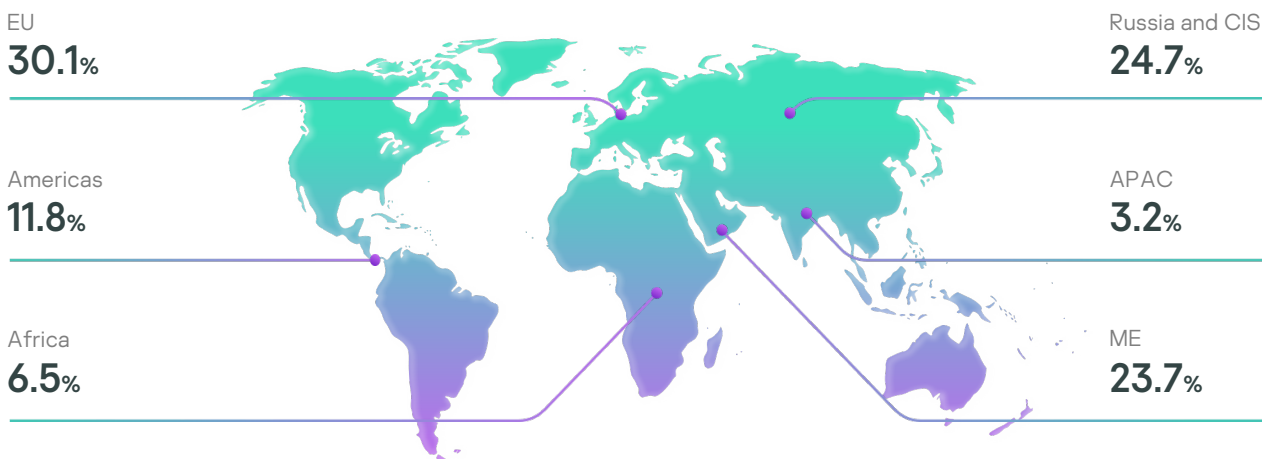

## Verticals and industries

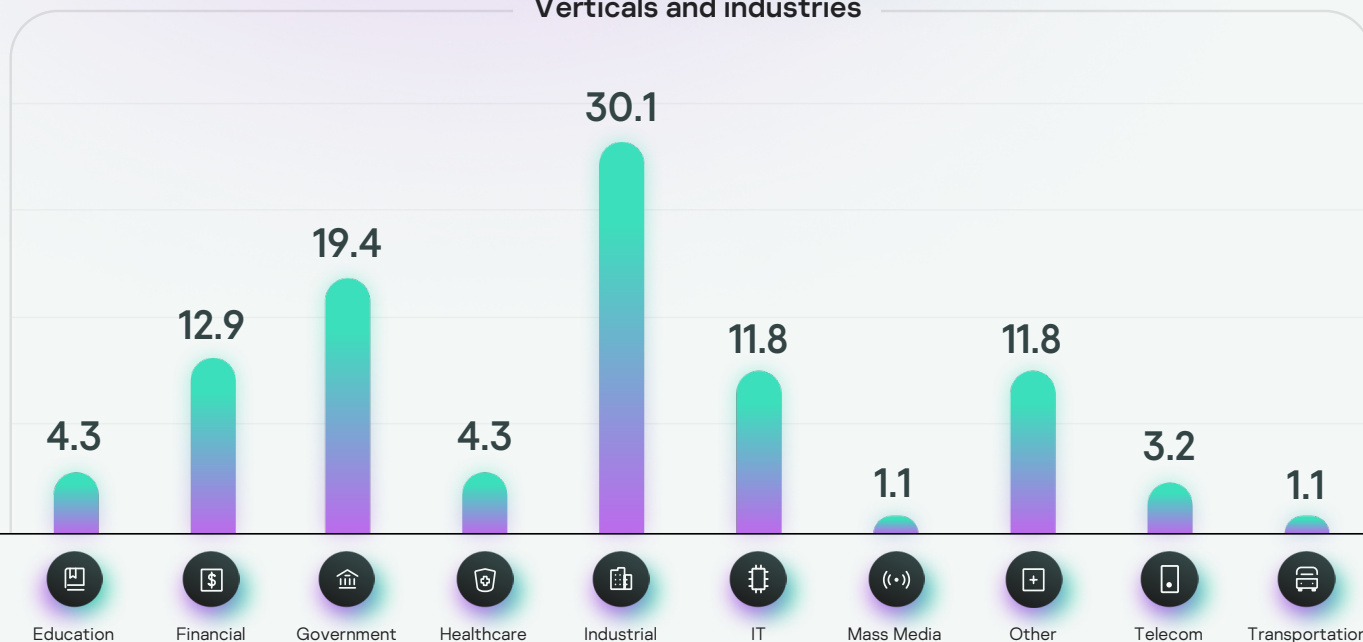

1. The analytics are based on commercial incident response cases performed by Kaspersky

2. <https://www.kaspersky.com/enterprise-security/incident-response>


# Why incident response is so critical



Ransomware is overtaking money theft and other impacts as a more convenient monetization scheme with much broader industry coverage (not just financial). We can confidently classify most incidents with causes before impact (suspicious events, tool alerts, etc.) as ransomware.

## True positives


For many years, ransomware attacks have retained a dominant role in the cybersecurity threat landscape. We urge you to get up-to-date and actionable information about ransomware attacks from our [publications](#) and [NoRansom project](#).

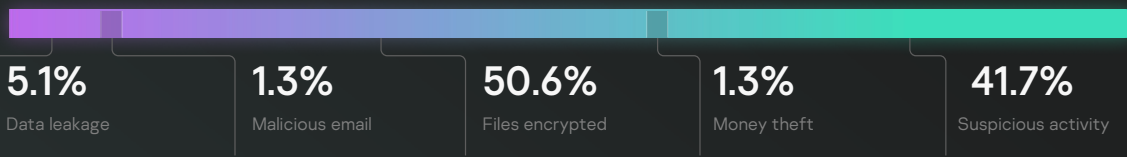

## False positives


12.9% of all incident response requests were for false alarms. Suspicious activity<sup>3</sup> reported by network sensors (NIDS, firewall) and endpoint protection (EPP) generate the most false positives.

Every second request based on suspicious activity from a network sensor or endpoint was a false positive. Data leakage false positive cases are usually duplicates or leaks from a different organization.

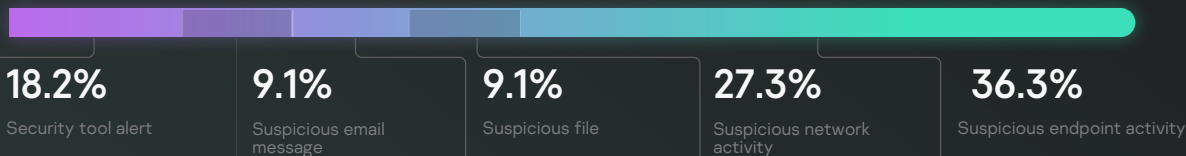


## Reasons per region

Ransomware attacks and suspicious activity were the primary reasons to trigger an investigation throughout most regions.

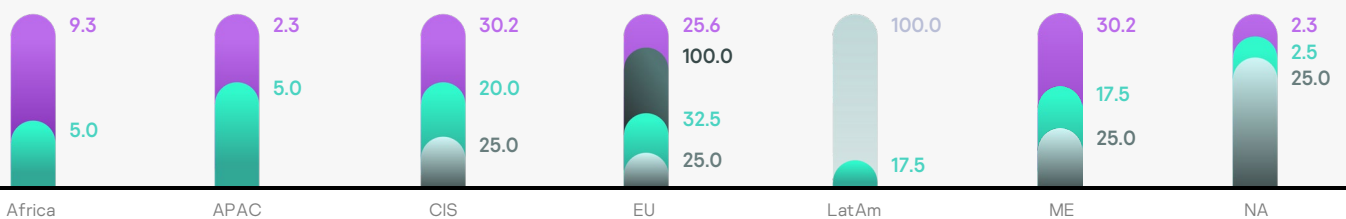

## Reasons per industry

Even when targeting the financial sector, money is no longer the goal for attackers. Data is the target - and data leakage is the reason for half of our investigations in the sector.

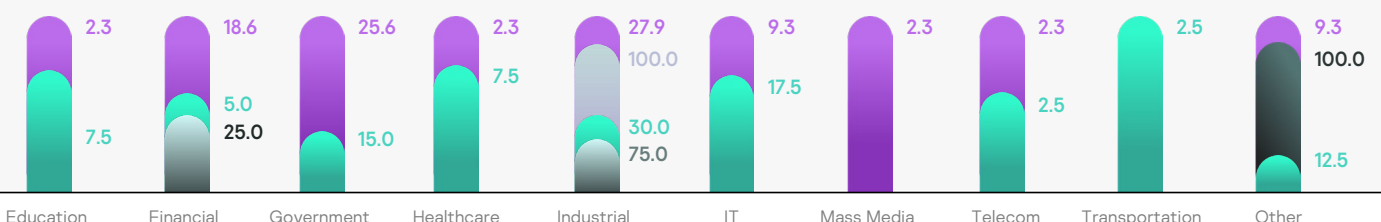

■ Data leakage ■ Files encrypted ■ Malicious Email ■ Money theft ■ Suspicious activity

<sup>3</sup> Suspicious activity is a category for a security tool stack generated alert or user reported anomalous behavior.


# Initial vectors

## Or how attackers get in

Year after year, security issues with passwords, software vulnerabilities and social engineering combine into an overwhelming majority of initial access vectors<sup>4</sup> during attacks. Setting up and controlling a password policy, patch management and employee awareness along with anti-phishing measures significantly minimize the capabilities of external attackers. When attackers prepare their malicious campaign, they want to find low-hanging fruit like public servers with well-known vulnerabilities and known exploits.


Implementing an appropriate patch management policy alone will reduce the likelihood of becoming a victim by 50%.

In 2021, vulnerabilities were discovered in MS Exchange. Because of Exchange's ubiquitous nature and publicly available exploits for these vulnerabilities, the result is a huge number of related incidents.

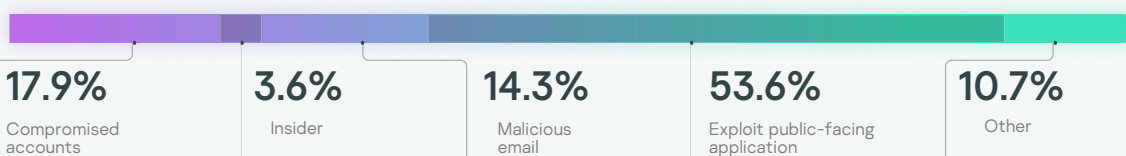


## Top initial compromise vectors, and how incidents were detected

Ransomware adversaries use almost all widespread initial access scenarios. Many attacks start with already compromised known credentials, and it's not possible to investigate how they were leaked.

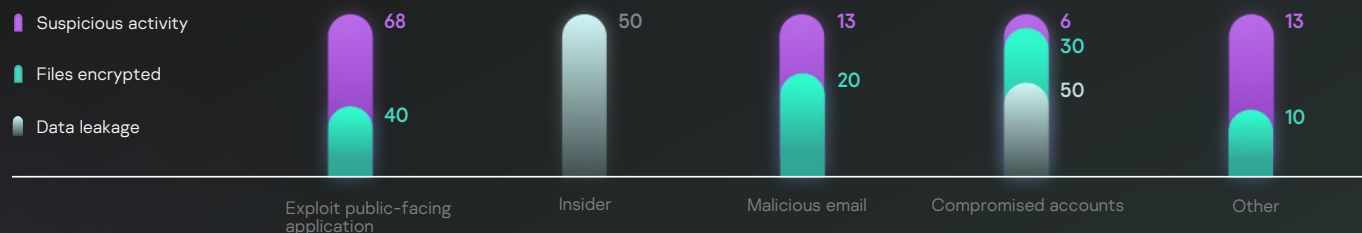

## How long the attack went unnoticed, and the top initial vectors


Most of the cases where initial access wasn't identified lasted for more than a year before being detected by the organization, by which time no artefacts were left to analyze due to log rotation policies. More than half of all attacks that started with malicious e-mails, stolen credentials and external application exploitation were detected in hours or days.

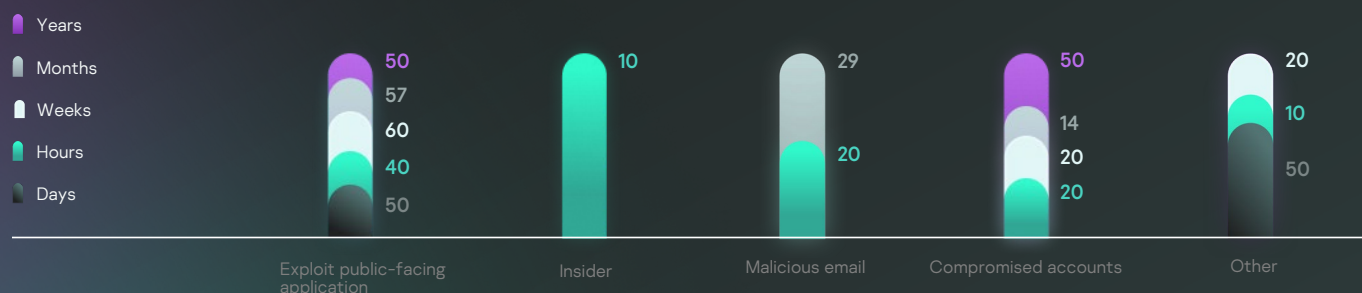

<sup>4</sup> We identified the initial vector of attack for 30% of cases. Very old incidents, unavailable logs, (un)intentional evidence destruction by victim organization, and supply-chain attacks are among the numerous reasons not to reveal how adversaries initially gained a foothold into the network

# Tools and exploits

**40.0%**  
of all incidents were tied to tools




Almost half of all incident cases included the usage of **existing OS tools** (like Lolbins)<sup>5</sup>, well known offensive tools from github (e.g. Mimikatz, AdFind, Masscan) and specialized commercial frameworks (Cobalt Strike).


Because it's very hard to detect these with traditional security controls, another approach is required. Kaspersky Managed Detection and Response detects the usage of such software.

## ✦ Distribution and frequency of tools inside incident cases

Frequent  
**5-8%**  
Cobalt Strike, Mimikatz, PowerShell, PsExec



Average  
**3-4%**  
Advanced IP Scanner, BitLocker, ProcDump, ProcessHacker




Rare  
**1-2%**  
AnyDesk, DiskCryptor, Everything, Fast Reverse Proxy FRP, Meterpreter, reg.exe, RMS, SMBExec, WebBrowserPassView.exe



Distribution and frequency of tools through ATT&CK tactics demonstrate a clear and obvious focus on everything between initial access and impact. Those tools should boost incident detection while adversaries explore the network.

- Execution  
PowerShell  
PsExec  
SmbExec
- Discovery  
Advanced IP Scanner  
nbtscan  
wmic
- Command and Control  
RDP  
AnyDesk  
RMS
- Defense evasion  
ProcessHacker  
POHunter  
PowerTool
- Collection  
Everything  
7zip
- Impact  
DiskCryptor  
BitLocker
- Credential Access  
Mimikatz  
PowerTool  
ProcDump
- Lateral Movement  
Cobalt Strike  
Impacket  
PowerSploit  
Empire\_Powershell

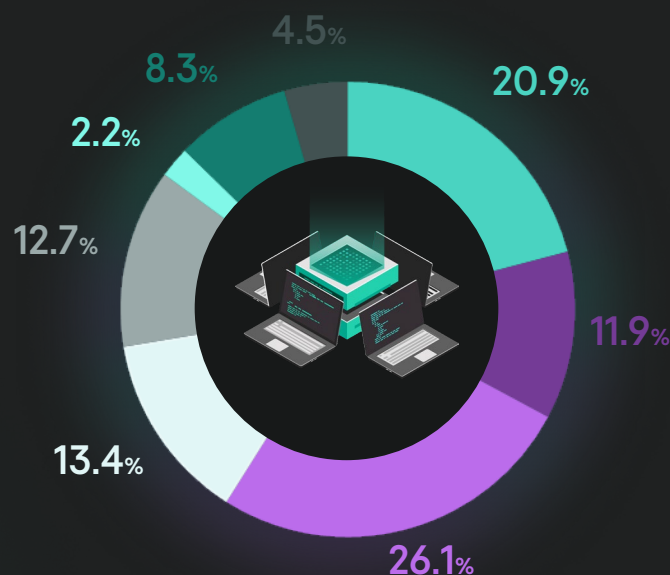

5. <https://lolbas-project.github.io>

6. Each tool was identified in 5-8% of incident cases



## ❖ Exploit usage was identified in 14% of all incidents

In 2021, vulnerabilities for widely used software were published and affected many companies. Patch management policies continue to be a very important security point.



### Microsoft Exchange

CVE-2021-34523

Elevation of Privilege (EoP) vulnerability. The vulnerability allows attackers to raise their permissions. Part of the ProxyShell vulnerabilities chain.



### Microsoft Exchange

CVE-2021-26857

An insecure deserialization vulnerability in the Unified Messaging service in Microsoft Exchange. Attackers need to authenticate using other exploits or stolen credentials. The vulnerability allows attackers to execute arbitrary code and write arbitrary files. Used by the Hafnium group.



### Microsoft Exchange

CVE-2021-34473

Remote Code Execution (RCE) vulnerability. Flaw in the Autodiscover service of Exchange Server, unauthenticated attackers can access its restricted resources and leverage this in conjunction with other vulnerabilities to execute arbitrary code. Part of the ProxyShell vulnerabilities chain.



### Microsoft Exchange

CVE-2021-26855

SSRF vulnerability in Microsoft Exchange Server. Attackers are able to send arbitrary HTTP requests and authenticate as the Exchange server. Used by the Hafnium group.



### Microsoft Exchange

CVE-2021-31207

Security Feature Bypass vulnerability. The vulnerability allows attackers to bypass the authentication process. Part of the ProxyShell vulnerabilities chain.



### Apache Solr

CVE-2019-17558

Remote code execution vulnerability allows attackers to execute arbitrary code without authentication in Apache Solr through the VelocityResponseWriter.



### Microsoft Exchange

CVE-2021-27065

Post-authentication arbitrary file write vulnerability. Attackers need to authenticate using other exploits or stolen credentials. The vulnerability allows attackers to execute arbitrary code and write arbitrary files. Used by the Hafnium group.



### Gigabyte Drivers

CVE-2018-19320

GDrv low-level driver vulnerability. The attackers use the exposed functions in gdrv.sys that allow a low-level user to allocate and write data to memory for escalating the privileges to SYSTEM.



### Microsoft Exchange

CVE-2021-26858

Post-authentication arbitrary file write vulnerability. Attackers need to authenticate using other exploits or using stolen credentials. The vulnerability allows attackers to execute arbitrary code and write arbitrary files. Used by the Hafnium group.




### Fortinet FortiOS

CVE-2018-13379


A path traversal vulnerability in the FortiOS SSL VPN web portal allows unauthenticated attackers to download system files via specially crafted HTTP resource requests.

# Attack duration

All incident cases can be grouped into three categories with different attack dwell times, incident response duration and attack impact.

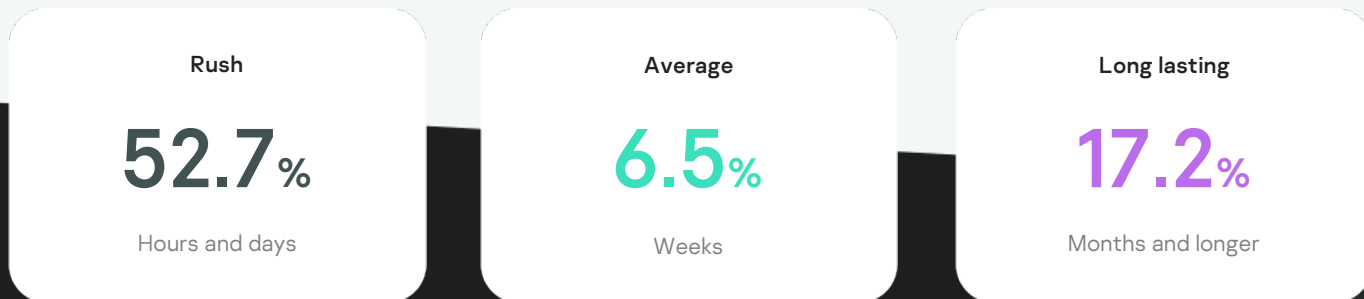

## Average attack duration

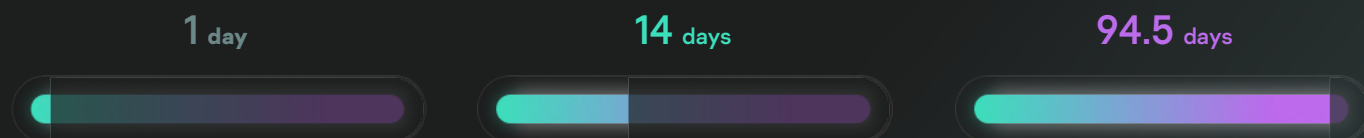


## Representative impact



## Incident response duration

Time spent investigating

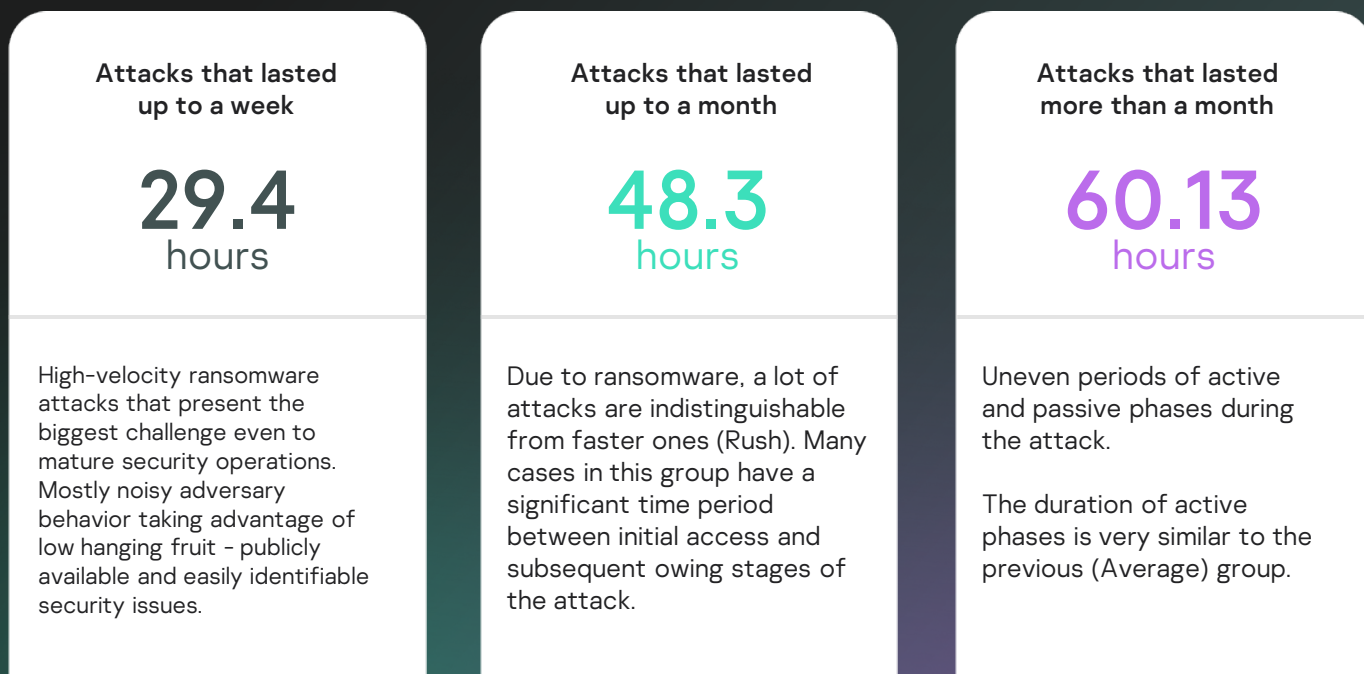

# Contacts

- For business inquiries and new incident response retainers:

[intelligence@kaspersky.com](mailto:intelligence@kaspersky.com)

---

- For assistance with emergency cases:

[gert@kaspersky.com](mailto:gert@kaspersky.com)

kaspersky